


NOTE:
 MINIMUM (2) TIES (TOP & BOTTOM)
 REQUIRED. USE A THIRD TIE WHEN
 NECESSARY TO KEEP TREE UPRIGHT
 POSITION. TIES TO BE SECURED TO
 AVOID SLIPPAGE. WRAP STAKE TO
 FORM FIGURE EIGHT, SCREW W/ 1
 GALV. SCREW THROUGH EACH TIE
 INTO POLE

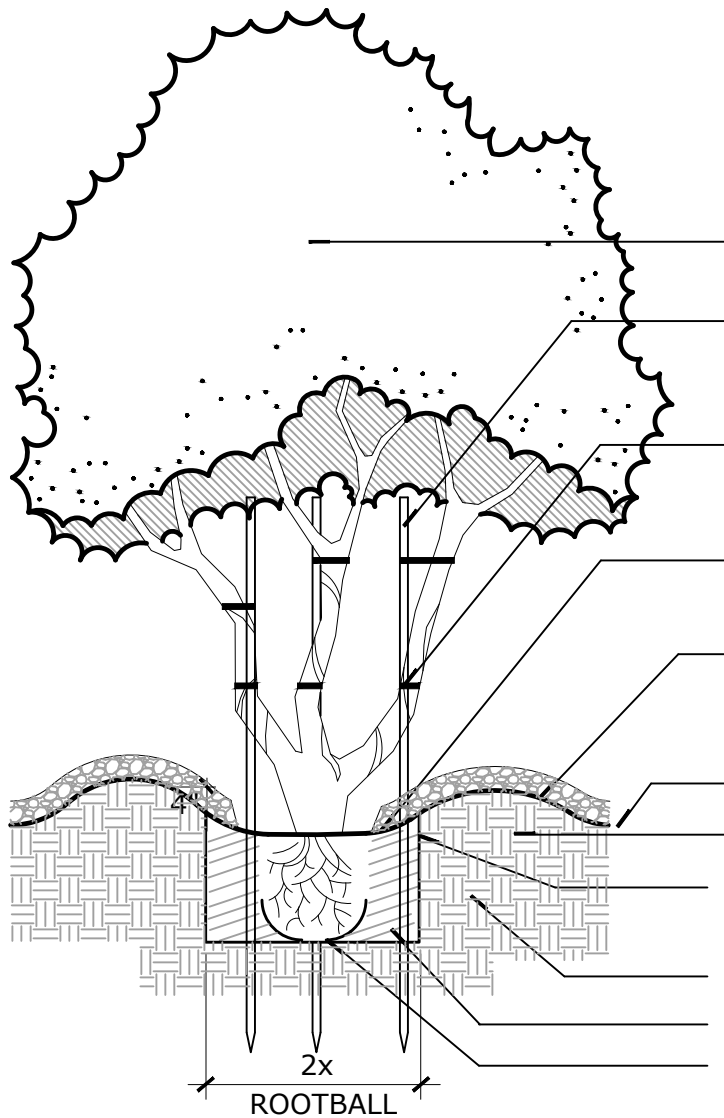

MULTI-TRUNK TREE (PER PLAN)

3 3" DIA x 10' LONG
 LODGE POLE STAKES

CINCH TREE TIES (BLACK) PER
 MFG. REQUIREMENTS

SET TOP OF ROOTBALL 1" ABOVE
 FINISH GRADE

2-3" LAYER OF GRAVEL, RAKE BACK
 OVER ROOT BALL AFTER
 MAINTENANCE PERIOD

FINISH GRADE



EARTH WATERING BASIN

ROOT BARRIER NEEDED FOR
 PLANTING W/IN 5' OF SIDEWALK

NATIVE SOIL

BACKFILL MIX, SEE NOTE #14

ROOTBALL

SCALE N.T.S.	REVISIONS NO. DATE	La Quinta GEM of the DESERT	DESIGN AND DEVELOPMENT DEPARTMENT	STANDARD PLAN NO.
		APPROVED BY: CITY OF LA QUINTA	MULTI TRUNK TREE STAKING DETAIL	702 SHEET 1 OF 1
		 BRYAN MCKINNEY PUBLIC WORKS DIRECTOR/CITY ENGINEER R.C.E. NO. 49418		