


MONUMENTING STREET INTERSECTIONS WHERE CURB AND GUTTERS ARE INSTALLED

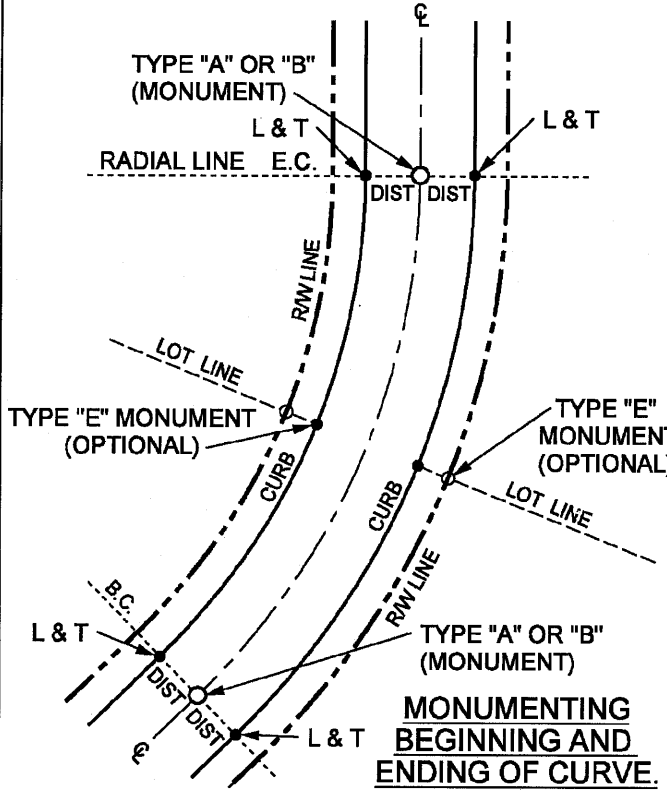

NOTES:

1. L & T SHOWN HEREON INDICATES LEAD AND TACK OR STEEL PIN MONUMENT SET IN CONCRETE CURB.
2. LEAD AND TAG OR STEEL PIN MONUMENT WITNESS TO PROPERTY CORNER MAY BE SET, ("E" MONUMENT), IN LIEU OF SETTING FRONT LOT CORNERS.
3. THE P.I. OF THE CURVE CENTERLINE OF A STREET MAY BE MONUMENTED IN LIEU OF E.C. & B.C. IF THE P.I. FALLS WITHIN THE TRAVELED WAY. IT SHALL BE REFERENCED WITH L & T's IN CURB.
4. SEE MONUMENT SPECS 21 FOR TYPE "A, C, D, & E" MONUMENT DESCRIPTION AND STD. 802 FOR TYPE "B" MONUMENT DRAWING. SEE SPECS 21.07 FOR MONUMENT SCHEDULE.

MONUMENTING BEGINNING AND ENDING OF CURVE.

R.C.T.D. STD. No. 901

REVISIONS:

APPROVED
08/21/01

CHRIS A. VOGT
CITY ENGINEER
RCE 44250



City of La Quinta

STREET CENTERLINE MONUMENT

STANDARD

801

SHEET 1 OF 1