




NOTES:

1. ROOT BARRIERS SHALL BE MANUFACTURED BY "DEEP ROOT" OR APPROVED EQUAL
2. ROOT BARRIERS MUST BE INSTALLED FOR ANY TREE WITHIN 5' OF ANY HARDSCAPE SURFACE OR DECOMPOSED GRANITE PATH
3. DEEPROOT BARRIER SHALL BE INSTALLED ADJACENT TO THE IMPROVEMENT. DO NOT CIRCLE DEEPROOT BARRIER AROUND THE ROOTBALL.
4. TOP OF ROOT BARRIERS MUST BE FLUSH WITH GRADE
5. PROVIDE 24" BELOW GRADE ROOT BARRIERS ADJACENT CURBS
6. PROVIDE 18" BELOW GRADE ROOT BARRIERS ADJACENT ADJACENT SIDEWALKS
7. PROVIDE BIO-BARRIER FOR TREES AS INDICATED IN SPECS.

SECTION

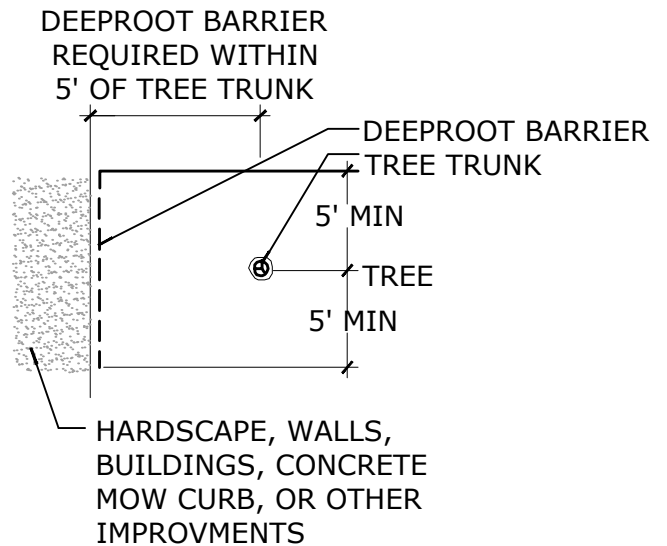

PLAN VIEW

SCALE N.T.S.	REVISIONS NO. DATE	<i>La Quinta</i> GEM of the DESERT	DESIGN AND DEVELOPMENT DEPARTMENT	STANDARD PLAN NO.
		APPROVED BY: CITY OF LA QUINTA	ROOT BARRIER DETAIL	709
		 BRYAN MCKINNEY PUBLIC WORKS DIRECTOR/CITY ENGINEER R.C.E. NO. 49418		